



## SLD1268-E V3 12.1" TFT LCD, LED Backlight 1600nits, 1024x768

SLD1268-E is an innovative sunlight readable, LED backlight LCD display. It provides LCD panel with specific ratios for digital signage, public transportation, exhibition hall, department store, vending machine and industrial applications. Incorporating with AD. Control board and backlight design, it is high brightness and sunlight readable panel, can display high-quality video with energy-efficient.

### Key Features

- High Brightness 1600 nits
- Sunlight Readable
- Wide Operation Temperature
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours



### Specifications

<b>Model Name</b>	<b>SLD1268-E V3</b>
<b>Description</b>	12.1" TFT LCD, 1600 nits LED Backlight, 1024x768
<b>Screen Size</b>	12.1"
<b>Display Area (mm)</b>	245.8(H) x 184.3(V)
<b>Brightness</b>	1600 cd/m <sup>2</sup>
<b>Resolution</b>	1024x768
<b>Contrast Ratio</b>	600 : 1
<b>Pixel Pitch (mm)</b>	0.24(H) x 0.24(V)
<b>Pixel Pre Inch (PPI)</b>	106
<b>Viewing Angle</b>	160°(H),160°(V)
<b>Color Saturation (NTSC)</b>	80%
<b>Display Colors</b>	16.2M
<b>Response Time (Typical)</b>	35ms
<b>Panel Interface</b>	LVDS
<b>AD Board Input Interface</b>	VGA, DVI
<b>Input Power</b>	DV 12V
<b>Power Consumption</b>	13.8W
<b>OSD Key</b>	4 Keys (Power Switch, Menu, +, -)
<b>OSD Control</b>	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
<b>Dimensions (mm)</b>	272x205.4x36.2mm
<b>Bezel Size(U/B/L/R)</b>	9.15/8.3/12.4/10.6 mm
<b>Weight (Net)</b>	1kg
<b>Mounting</b>	75x75 mm
<b>Operating Temperature</b>	-30°C ~ 85 °C
<b>Storage Temperature</b>	-30 °C ~ 85 °C

SLD= Panel + LED Driving Board + AD Control Board + Housing




Specifications are subject to change without notice.  
All brands or product names are trademarks or registered trademarks of their respective companies.

### Mechanical Drawing




### Outline Dimensions


Unit:mm

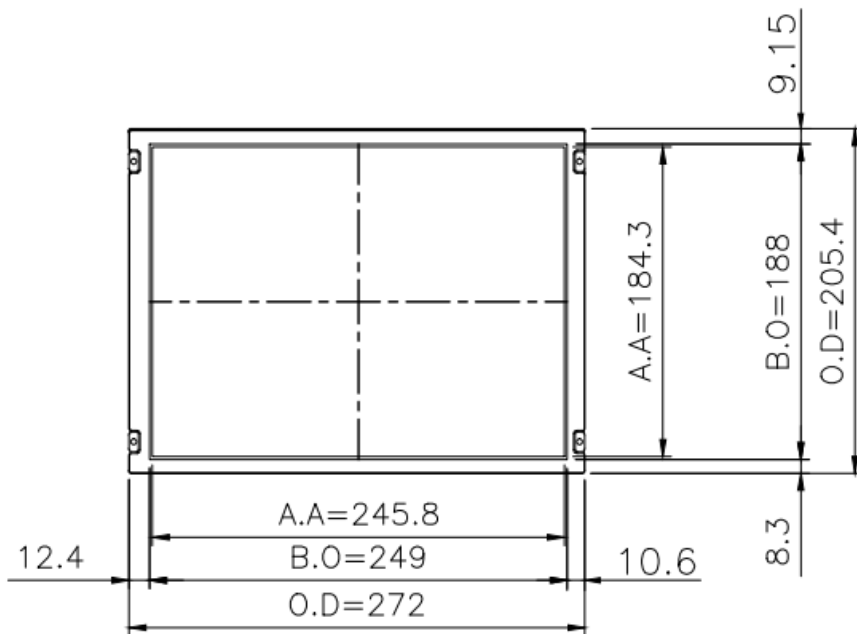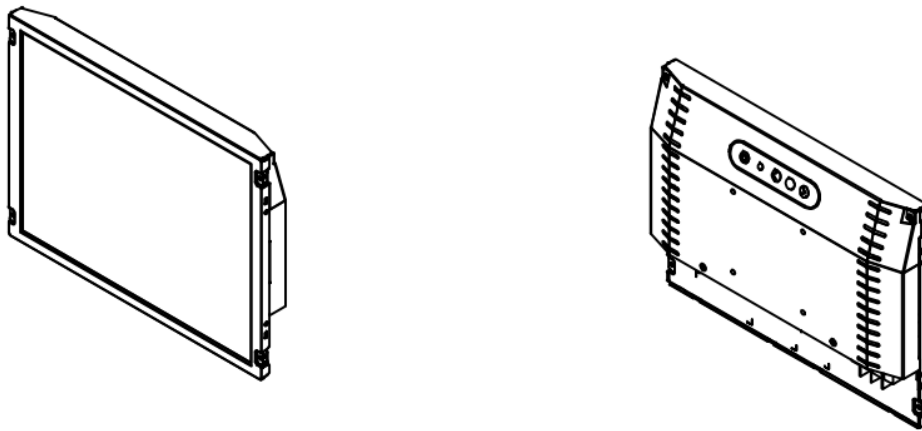

- LIGHT SENSOR
- DC 12V
- VGA
- AUDIO IN
- AUDIO OUT

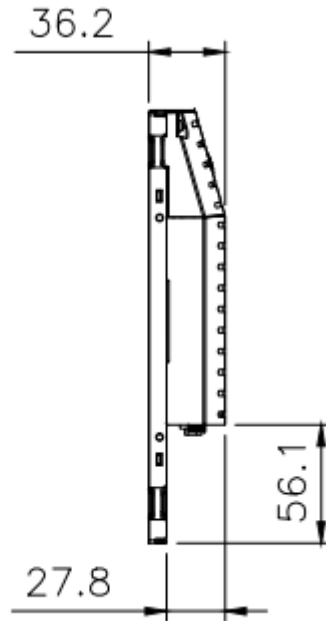

MEMBRANE 4-KEY

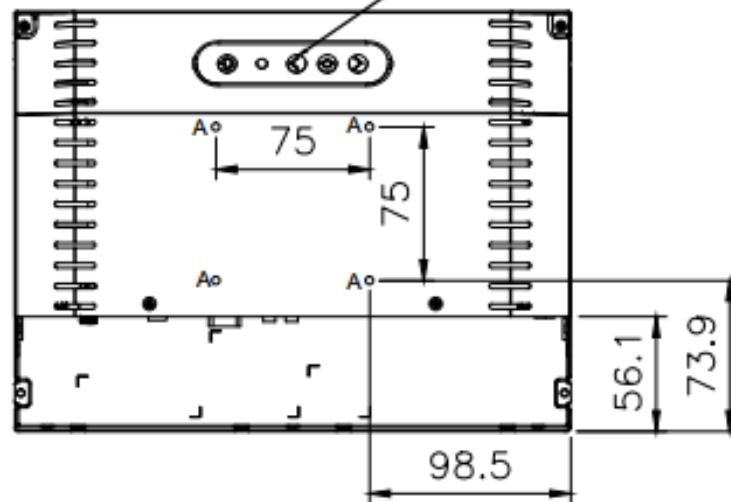

Note :

O.D. : Outline Dimension

B.O. : Bezel Opening

A.A. : LCD Active Area

A : 8-M4\_USER HOLE\_MAX\_DEPTH=5mm



### Ordering Information

Part Number	Description
SLD1268-ENB-I22	12.1",1600nits,XGA,LID12A,AD6038GA,O/B,L/S,2in1,V03

### Optional Accessories

Part Number	Description
840612051212	ADAPTER,AC/DC,12V/5A,60W.Power-Din-4P,CWT.G99-ABF060F-N022.Efficiency-level-6,R
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301031	CABLE.POWER.AC.1830mm Japan type

### Customer request

Touch	PCT (Multi-Touch)
Glass	Tempered glass, AR coating.....