



**SSF4485-INK / SSH4485-INK V1 MaxRGB**

**44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840 x 1076 ultra-wide aspect ratio 16:4.5**

The SSF/SSH4485-INK is a 44.8 inch color TFT-LCD display with special aspect ratio 16:4.5 and wide resolution 3840 x 1076 with HCS (High Color Saturation). It is Litemax's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

**Key Features**

- Resizing LCD
- Ultra-Wide Screen (16 : 4.5)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- High Color Saturation
- BL MTBF: 100,000 hours



**Specifications**

<b>Model Name</b>	<b>SSF4485-INK / SSH4485-INK V1 MaxRGB</b>
<b>Description</b>	44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x1076
<b>Screen Size</b>	44.8"
<b>Display Area (mm)</b>	1095.84(H) x 307.1(V)
<b>Brightness</b>	1000 cd/m <sup>2</sup>
<b>Resolution</b>	3840x1076
<b>Aspect Ratio</b>	16 : 4.5
<b>Contrast Ratio</b>	7800 : 1
<b>Pixel Pitch (mm)</b>	0.2854(H) x 0.2854(V)
<b>Pixel Per Inch (PPI)</b>	89
<b>Viewing Angle</b>	178°(H),178°(V)
<b>Color Saturation (NTSC)</b>	94%
<b>Display Colors</b>	1.07G
<b>Response Time (Typical)</b>	9.5ms
<b>Panel Interface</b>	V-by-One
<b>AD Board Input Interface</b>	VGA, DVI-D, HDMI, DP
<b>AD Board Input Power</b>	DC12V (DC24V optional)
<b>Power Consumption</b>	113W, (118W with AD Board)
<b>OSD Key</b>	5 Keys (Power Switch, Menu, +, Exit, -)
<b>OSD Control</b>	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
<b>Dimensions (mm)</b>	1121.7x 338.9 x 21.6
<b>Bezel Size(U/B/L/R)</b>	13.3/13.3/10.9/10.9 mm
<b>Weight (Net)</b>	6.8 kg
<b>Operating Temperature</b>	0 °C ~ 50 °C
<b>Storage Temperature</b>	-20 °C ~ 60 °C

**SSF**= Panel + LED Driving Board

**SSH**= Panel + LED Driving Board + AD Control Board

*Specifications are subject to change without notice.*




*All brands or product names are trademarks or registered trademarks of their respective companies.*





## Mechanical Drawing

### Outline Dimensions

Unit: mm

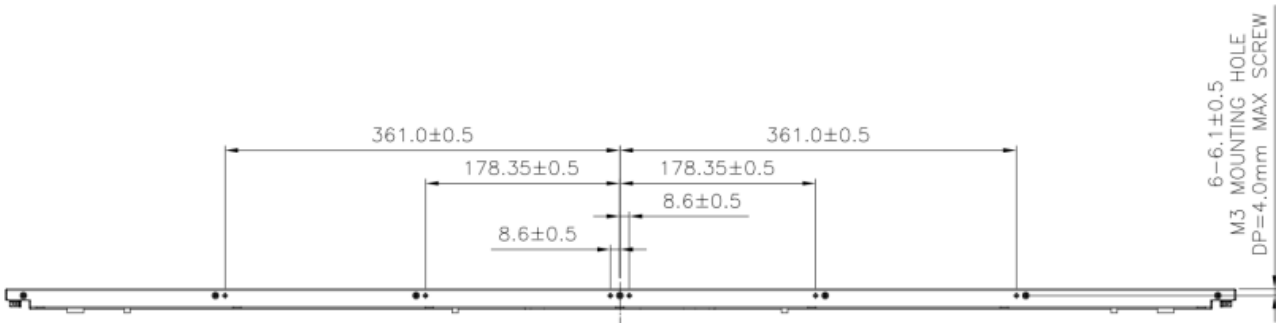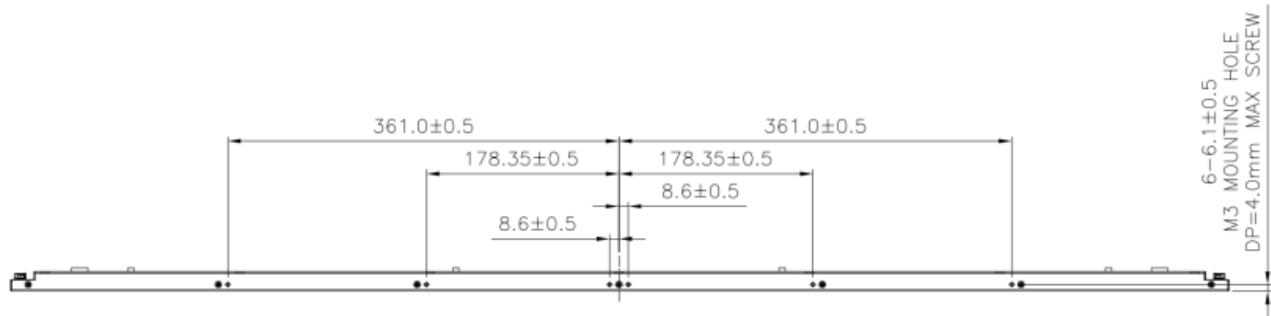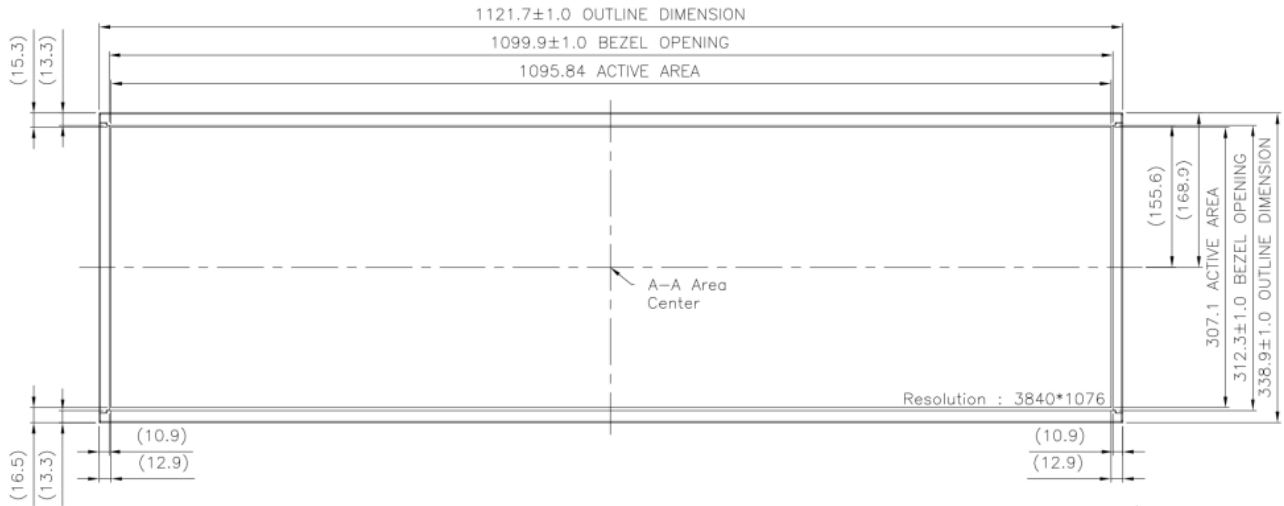

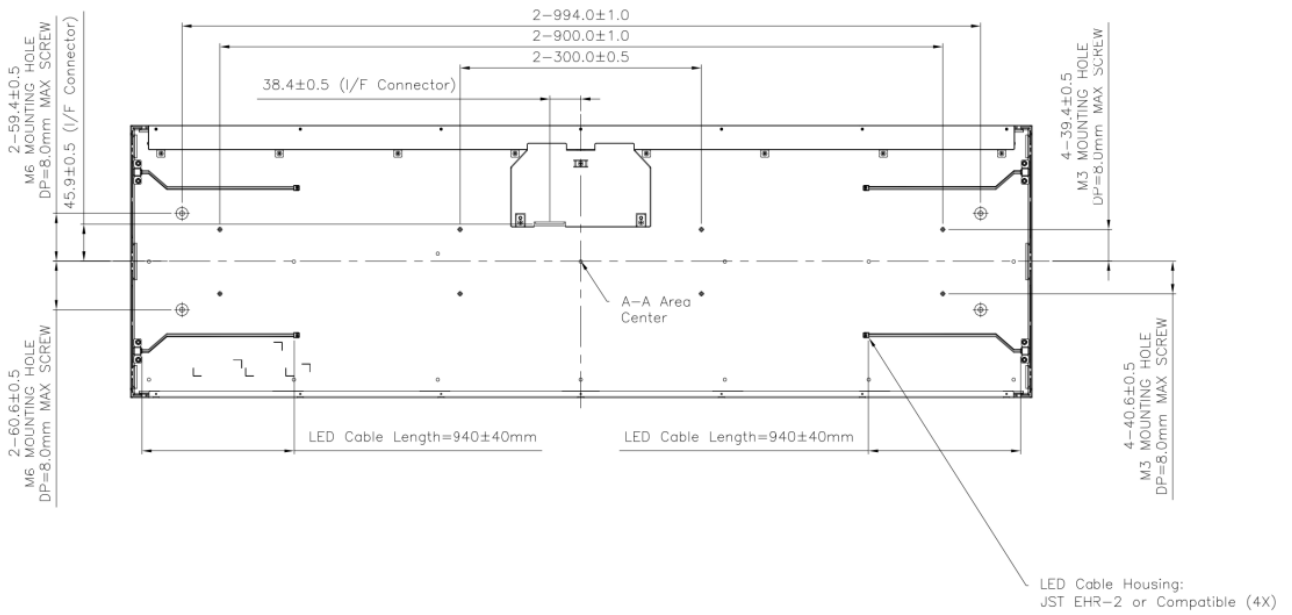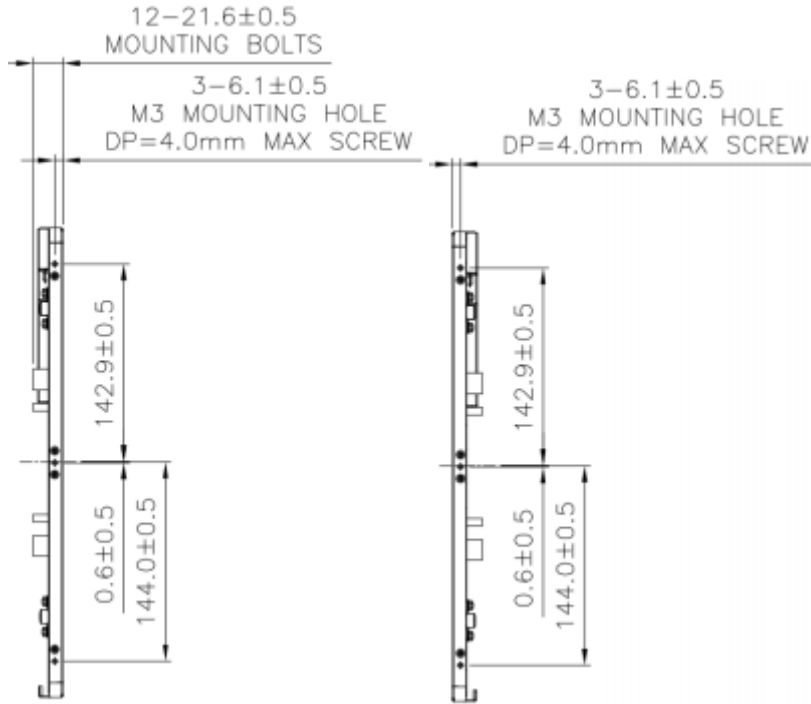



### Ordering Information

Part Number	Description
SSF4485-INK-A01	44.8",1000nits,3840*1076,MaxRGB,LID44A,3in1,V1
SSH4485-INK-M01	44.8",1000nits,3840*1076,MaxRGB,LID44A,AD9131GDHP,AC100~240V,3in1,V1

### Optional Accessories

Part Number	Description
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301031	CABLE.POWER.AC.1830mm Japan type

### By Customer Request

Glass	Tempered glass, AR coating.....
-------	---------------------------------