



## DLD2708-E

### 27" TFT LCD, 1600nits LED Backlight, 1920x1080

The DLD2708-E is a 27 inch industrial grade sunlight readable LCD, with high brightness 1600 nits, it produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

#### Key Features

- High Brightness 1600 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blackening Defect Free(Hi-Tni 105 °C)
- BL MTBF: 50,000 hours



#### Specifications

| Model Name              | DLD2708-E                                                    |
|-------------------------|--------------------------------------------------------------|
| Description             | 27" TFT LCD, 1600 nits LED Backlight, 1920x1080              |
| Screen Size             | 27"                                                          |
| Display Area (mm)       | 597.888(H)x336.312(V)                                        |
| Brightness              | 1600 cd/m <sup>2</sup>                                       |
| Resolution              | 1920x1080                                                    |
| Aspect Ratio            | 16 : 9                                                       |
| Contrast Ratio          | 1300 : 1                                                     |
| Pixel Pitch (mm)        | 0.3114(H)x0.3114(V)                                          |
| Pixel Per Inch (PPI)    | 82                                                           |
| Viewing Angle           | 178°(H),178°(V)                                              |
| Color Saturation (NTSC) | 81%                                                          |
| Display Colors          | 16.7M                                                        |
| Response Time (Typical) | 14ms                                                         |
| Panel Interface         | LVDS                                                         |
| Input Interface         | HDMI,DP                                                      |
| Input Power             | DC24V                                                        |
| Power Consumption       | 65W                                                          |
| OSD Key                 | 4 Keys (Power Switch, Menu, +, -)                            |
| OSD Control             | Brightness, Color, Contrast, Auto Turing, H/V Position...etc |
| Dimensions (mm)         | 628.6x366.4x48.3                                             |
| Bezel Size(U/B/L/R)     | 15.04/15.04/15.36/15.36mm                                    |
| Weight (Net)            | 5.7 kg                                                       |
| Mounting                | 100x100                                                      |
| Operating Temperature   | -20 °C ~ 60 °C                                               |
| Storage Temperature     | -30 °C ~ 80 °C                                               |

**DLD**= Panel + LED Driving Board + AD Control Board + Chassis

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.






## Mechanical Drawing

### Outline Dimensions

Unit: mm

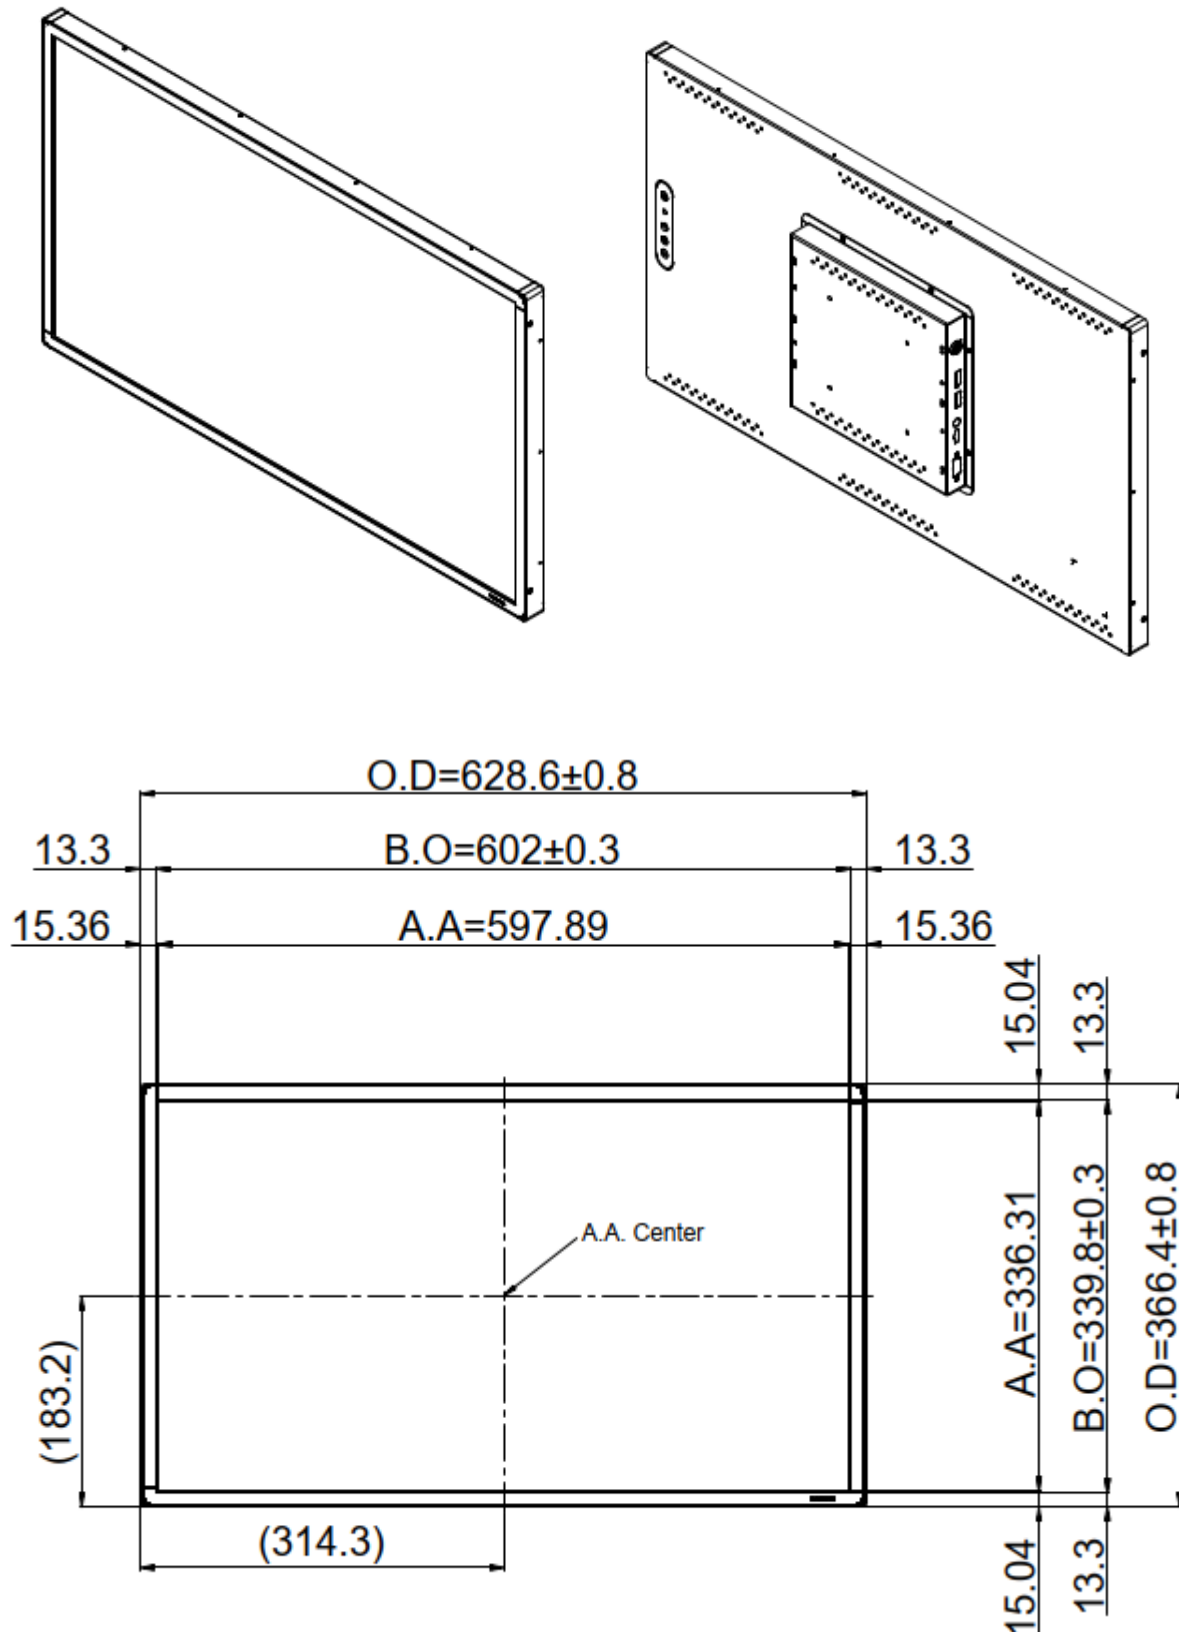

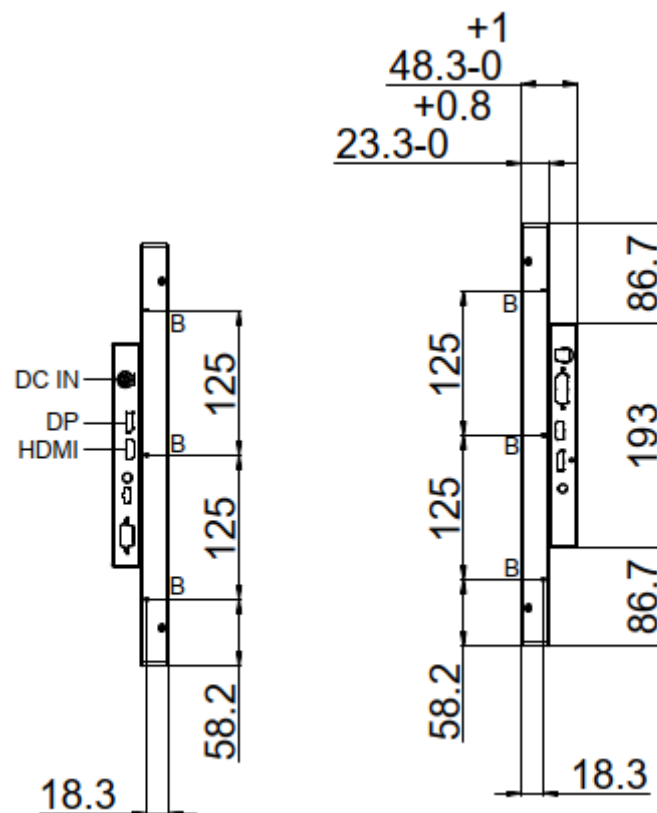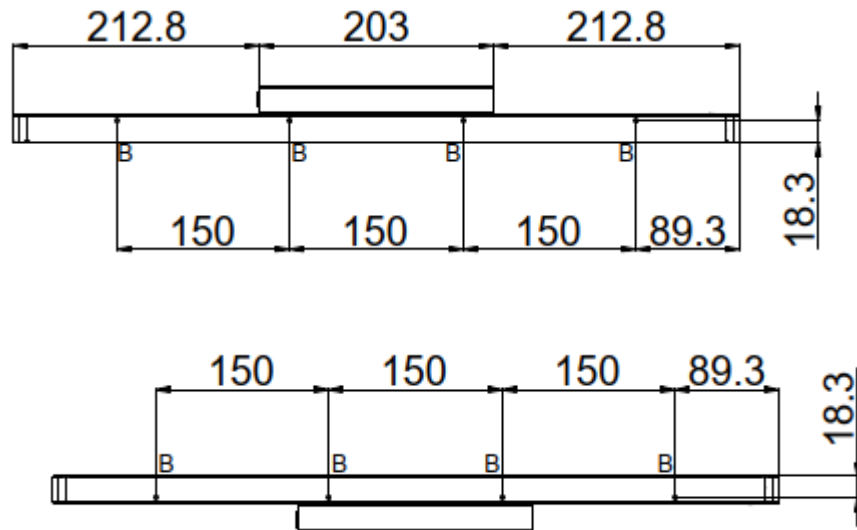

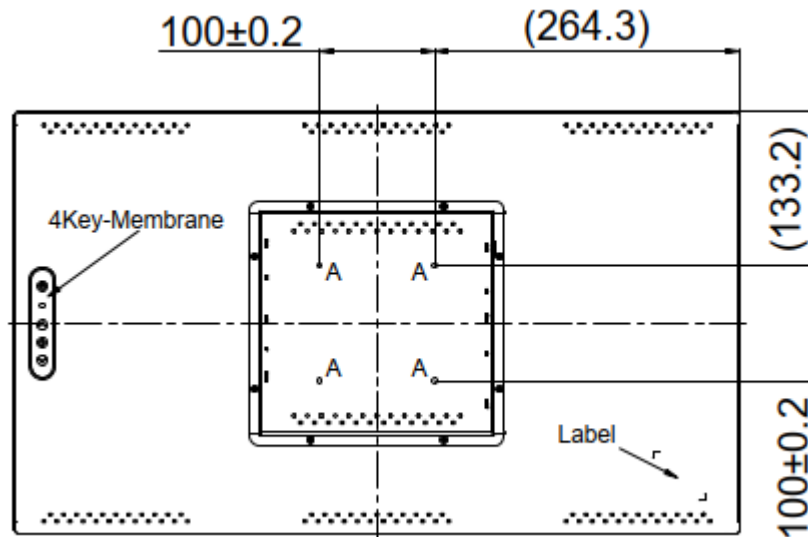

Note:

O.D. : OUTLINE DIMENSION

B.O. : BEZEL OPENING

A.A. : ACTIVE AREA

A : M4\_USER HOLE\_MAX Depth=6mm

B : M3\_USER HOLE\_MAX Depth=3mm



### Ordering Information

| Part Number            | Description                                                    |
|------------------------|----------------------------------------------------------------|
| <b>DLD2708-ENB-T11</b> | 27",1600nits,1920x1080,HTni,LID27C,AD68862HP,O/B,DC24V,3in1,V1 |

### Optional Accessories

| Part Number         | Description                          |
|---------------------|--------------------------------------|
| <b>810618301010</b> | CABLE,POWER,AC,1830mm USA type       |
| <b>810618301090</b> | CABLE,POWER,AC,1830mm Europe type    |
| <b>810618301050</b> | CABLE,POWER,AC,1830mm UK type        |
| <b>810618301170</b> | CABLE,POWER,AC,1830mm Australia type |
| <b>810618301031</b> | CABLE,POWER,AC,1830mm Japan type     |
|                     |                                      |

### By Customer Request

|              |                                 |
|--------------|---------------------------------|
| <b>Touch</b> | PCAP (Multi-Touch)              |
| <b>Glass</b> | Tempered glass, AR coating..... |