



## ULF/ULH0845-T 8.4" TFT LCD, 1000nits LED Backlight, 1024x768

The ULF/ULH0845-T is a 8.4 inch industrial grade sunlight readable LCD, with high brightness 1000 nits, it produce sharp images, crisp text and lifelike colors. The Ubipixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

### Key Features

- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Temperature (-20 °C ~ 70 °C)
- BL MTBF: 100,000 hours



### Specifications

Model Name	ULF/ULH0845-T
Description	8.4" TFT LCD, 1000 nits LED Backlight, 1024x768
Screen Size	8.4"
Display Area (mm)	170.496(H) x 127.872(V)
Brightness	1000 cd/m <sup>2</sup>
Resolution	1024x768
Aspect Ratio	4:3
Contrast Ratio	1600 : 1
Pixel Pitch (mm)	0.1665(H) x 0.1665(V)
Pixel Pre Inch (PPI)	152
Viewing Angle	176°(H),176°(V)
Color Saturation (NTSC)	81%
Display Colors	16.7M
Response Time (Typical)	25ms
Panel Interface	LVDS
Input Interface	VGA, DVI-D, HDMI
Input Power	DC12V
Power Consumption	6W (8W with AD board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	199.5(H) x 149(V) x 9.7(T)
Bezel Size(U/B/L/R)	10.814/10.314/14.502/14.502 mm
Weight (Net)	0.3kg
Operating Temperature	-20 °C ~ 70 °C
Storage Temperature	-20 °C ~ 70 °C

ULF= Panel + LED Driving Board

ULH= Panel + LED Driving Board + AD Control Board


Specifications are subject to change without notice.  
All brands or product names are trademarks or registered trademarks of their respective companies.




## Mechanical Drawing

### Outline Dimensions

Unit:mm

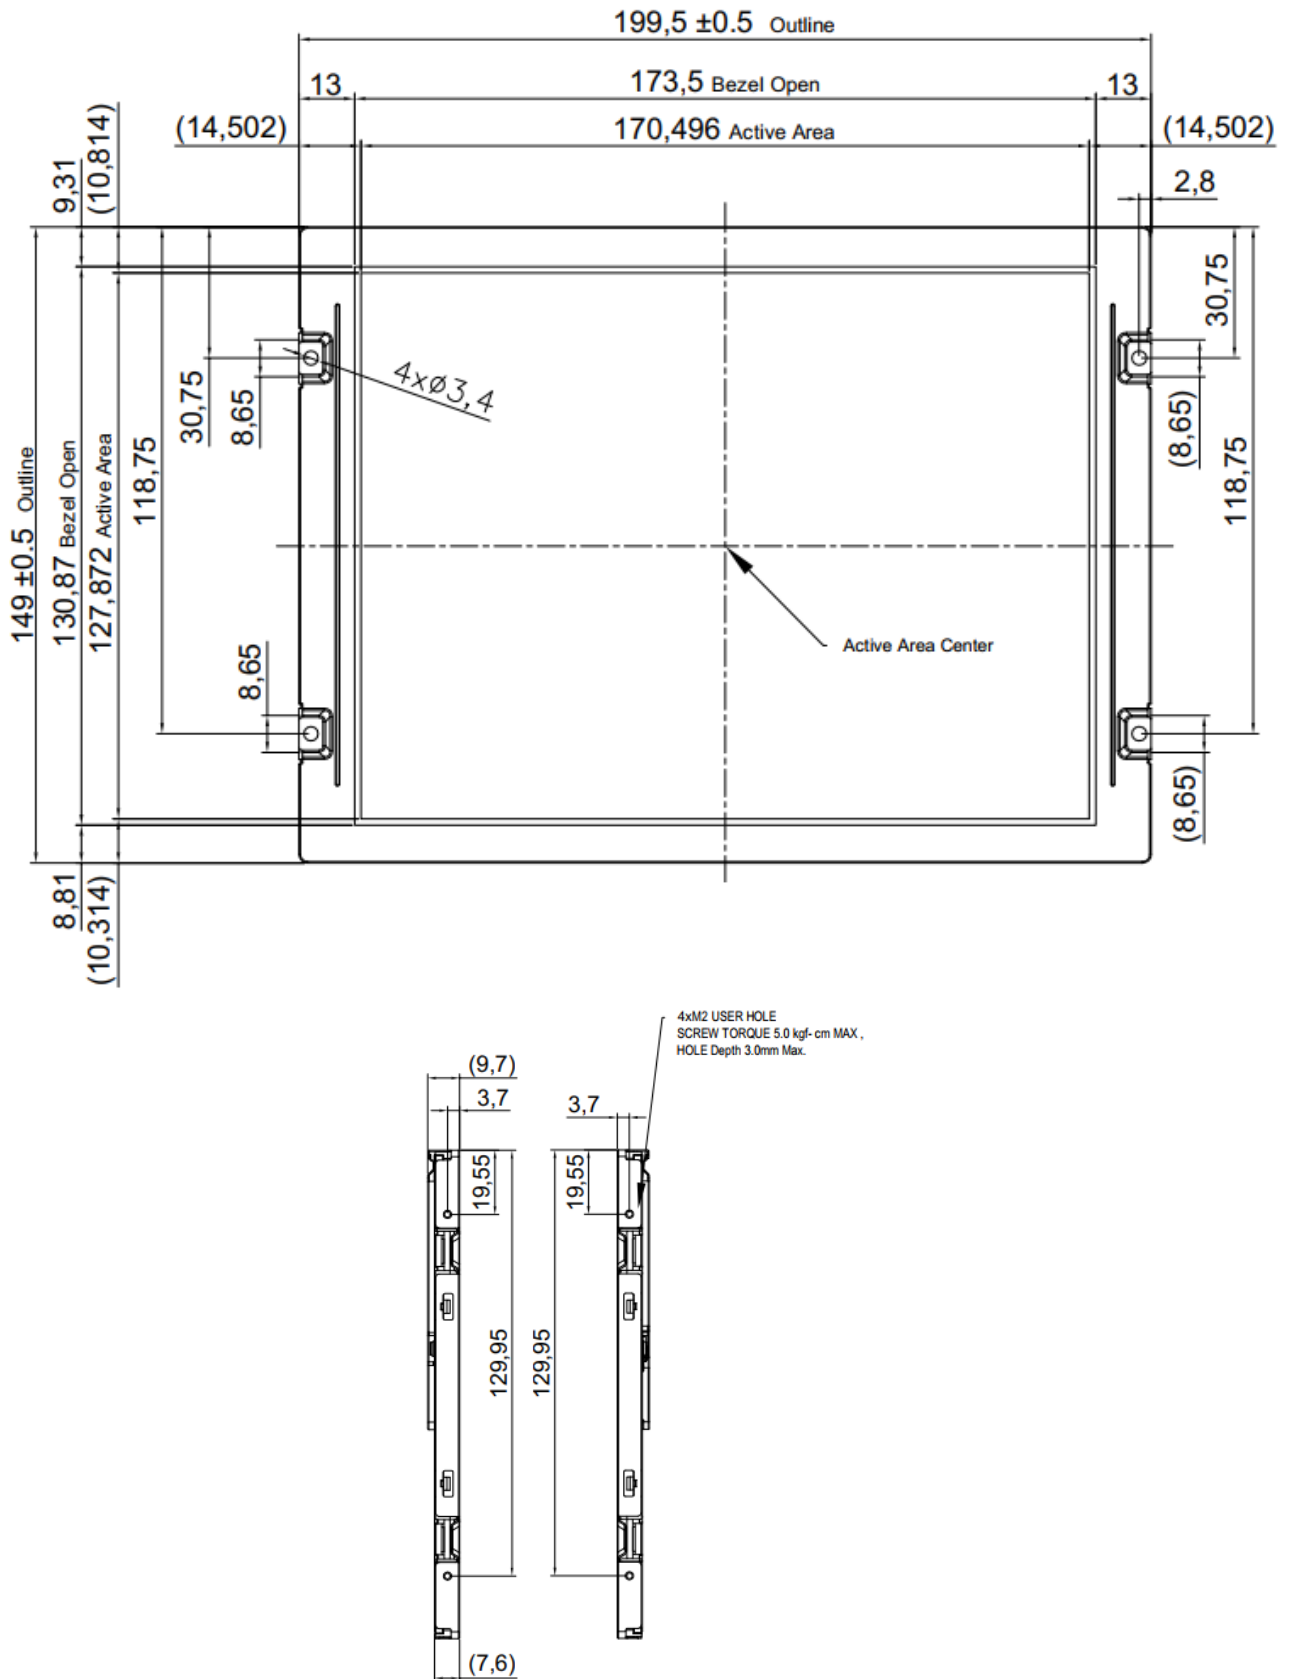

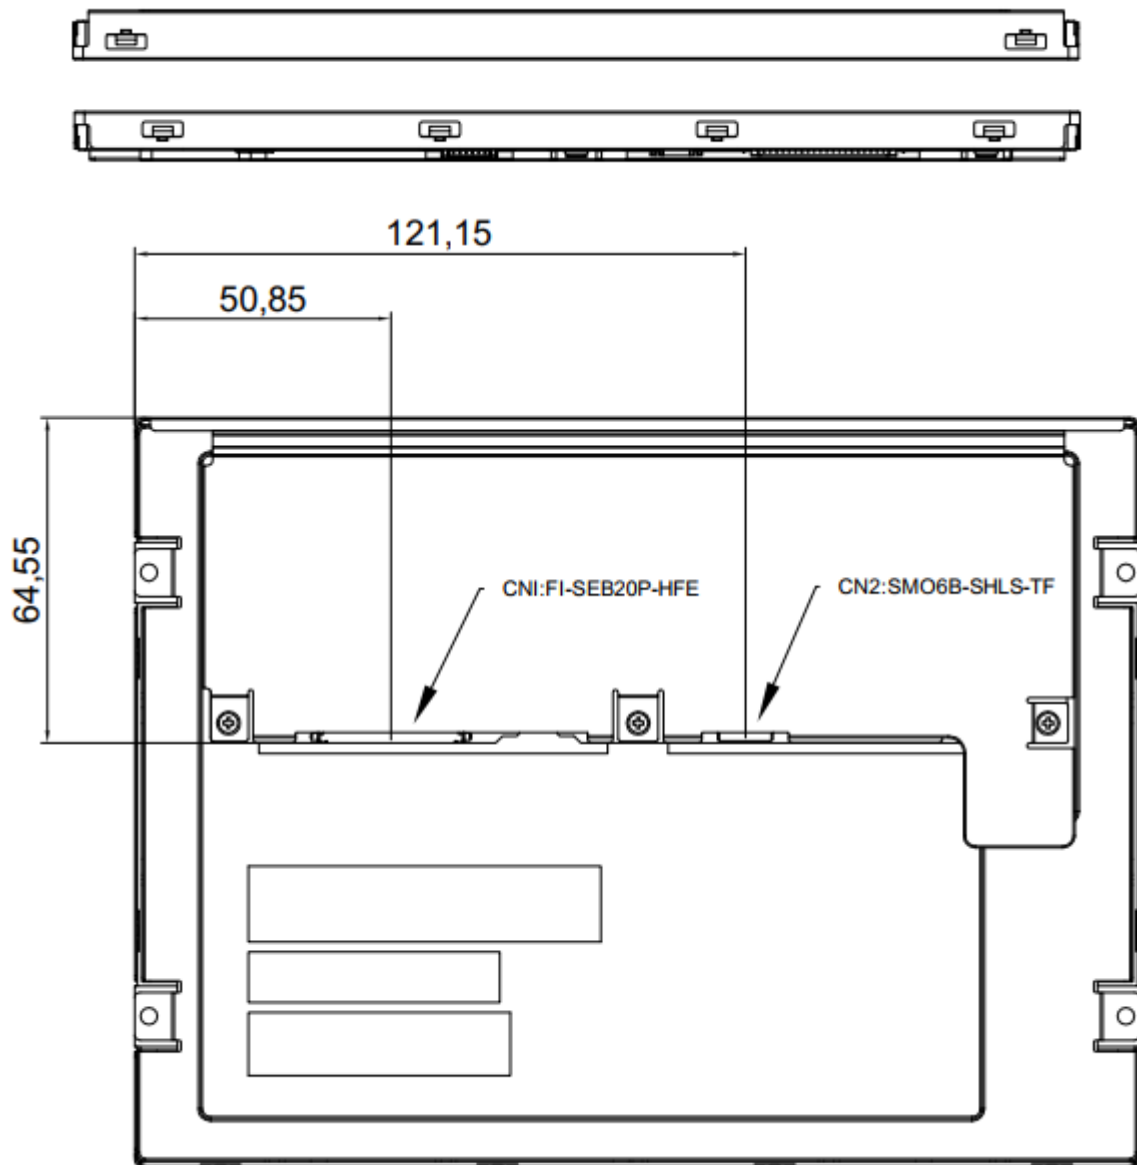

Note :

1.THE DIMENSION EXCLUDES DEFORMATION.

2.M2 USER HOLE SCREW TORQUE 5.0 kgf- cm MAX , HOLE Depth 3.0mm Max.



### Ordering Information

Part Number	Description
<b>ULF0845-TXN-A11</b>	8.4",1000nits,1024x768,T2070,LID08C(PWM),10in1,V1
<b>ULH0845-TXN-Q11</b>	8.4",1000nits,1024x768,T2070,LID08C(PWM),AD8891GDH,DC12V,10in1,V1

### Optional Accessories

Part Number	Description
<b>840612051212</b>	ADAPTER,AC/DC,12V/5A,60W,Power-Din-4P,CWT,G99-ABF060F-N022,Efficiency-level-6,R
<b>810618301010</b>	CABLE,POWER,AC,1830mm USA type
<b>810618301090</b>	CABLE,POWER,AC,1830mm Europe type
<b>810618301050</b>	CABLE,POWER,AC,1830mm UK type
<b>810618301170</b>	CABLE,POWER,AC,1830mm Australia type
<b>810618301031</b>	CABLE,POWER,AC,1830mm Japan type

### Customer request

<b>Touch</b>	SCT (Single-Touch), PCT (Multi-Touch)
<b>Glass</b>	Tempered glass, AR coating.....