



ULF/ULH1015-M 10.1" TFT LCD, 1000nits LED Backlight, 1920x1200

The ULF/ULH1015-M is a 10.1 inch industrial grade sunlight readable LCD, with high brightness 1000 nits, it produce sharp images, crisp text and lifelike colors. The Ubipixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military and transportation application.

Key Features

- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Temperature(-20 °C ~ 70 °C)
- BL MTBF: 50,000 hours



Specifications

Model Name	ULF/ULH1015-M
Description	10.1" TFT LCD, 1000 nits LED Backlight, 1920x1200
Screen Size	10.1"
Display Area (mm)	216.8(H) x 135.5(V)
Brightness	1000 cd/m ²
Resolution	1920x1200
Aspect Ratio	16 : 10
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.11292(H) x 0.11292(V)
Pixel Pre Inch (PPI)	224
Viewing Angle	170°(H),170°(V)
Color Saturation (NTSC)	83%
Display Colors	16.7M
Response Time (Typical)	25ms
Panel Interface	LVDS
Input Interface	HDMI, DP
Input Power	DC12V
Power Consumption	6.5W (8.5W with AD Board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	229.46 x 149.10 x 8.0
Bezel Size(U/B/L/R)	4.35/9.25/5.04/7.62
Weight (Net)	0.8 kg
Operating Temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C

ULF= Panel + LED Driving Board

ULH=Panel + LED Driving Board + AD Control Board



*Specifications are subject to change without notice.
All brands or product names are trademarks or registered trademarks of their respective companies.*




Mechanical Drawing


Outline Dimensions

Unit:mm

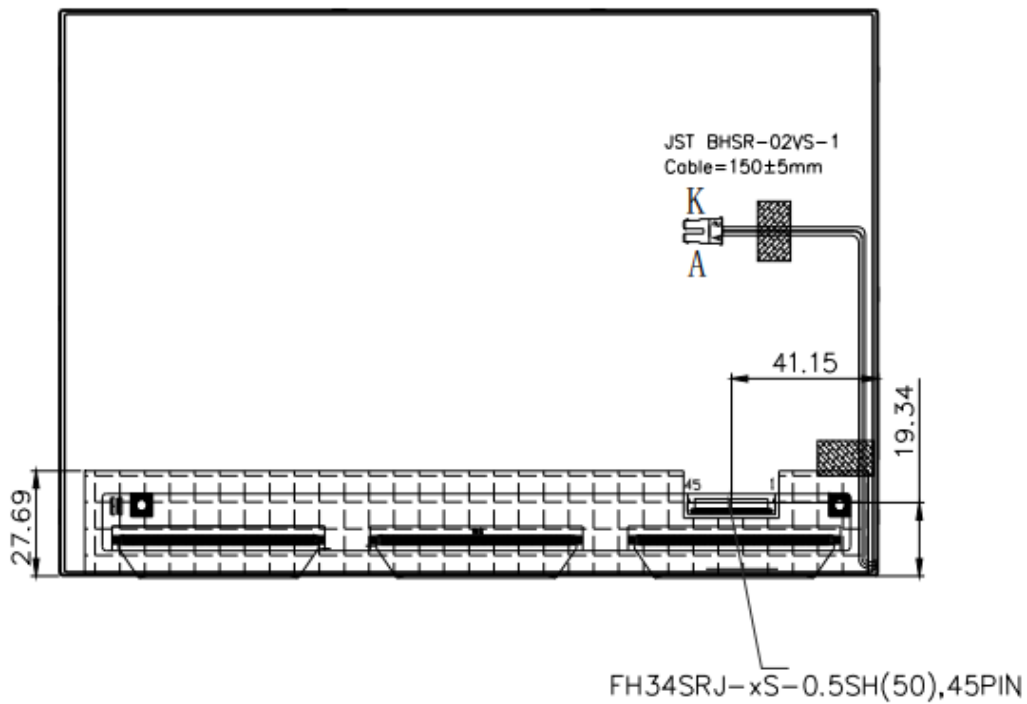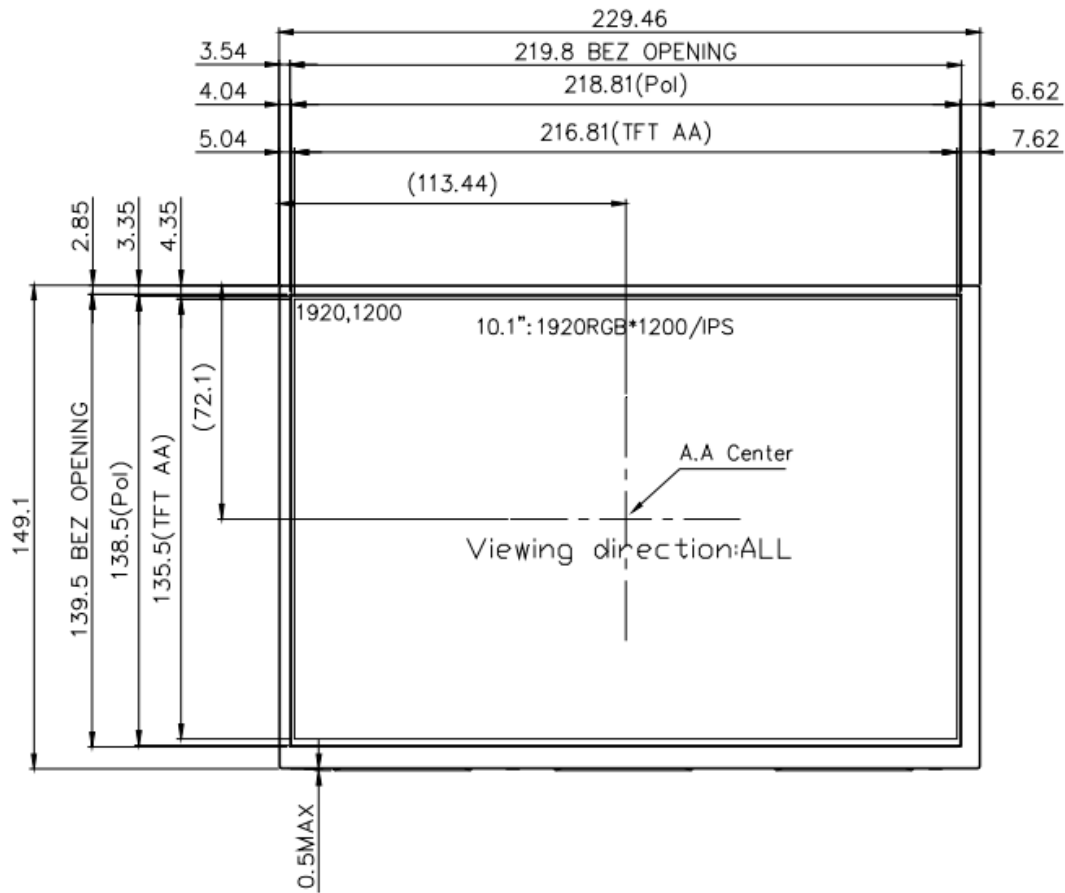

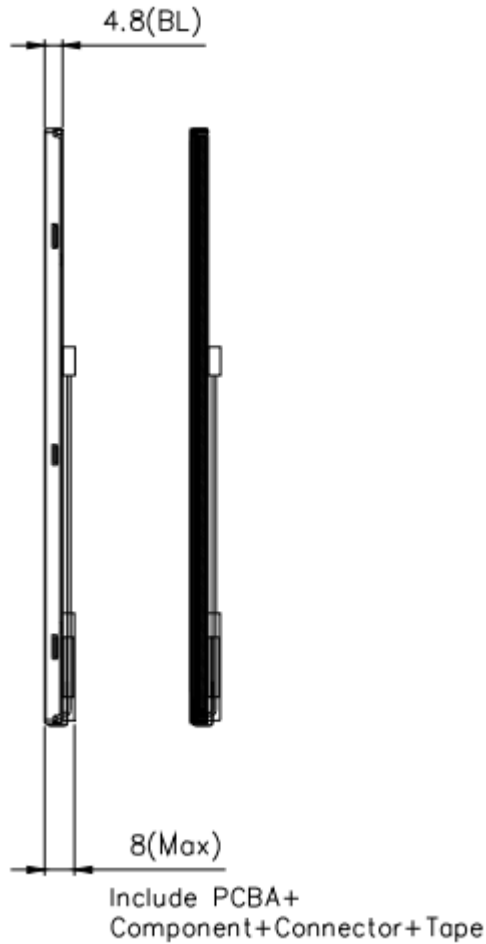

LED CIRCUIT DIAGRAM:



NOTE:

- 1 DISPLAY: 10.1" TFT TRANSMISIVE
- 2 VIEW DIRECTION: ALL
- 3 DRIVER IC: ST5892B
- 4 BL LED: 聚飞01.JB.ZF4014W65P00
- 5 OPERATION TEMP.: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 6 STORAGE TEMP.: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 7 UNSPECIFIED TOLERANCES IS $\pm 0.2\text{mm}$
- 8 ALL MATERIAL AND PROCESSING SHOULD BE LEAD FREE
- 9 CRITICAL DEMENSION MARKED *



Ordering Information

Part Number	Description
ULF1015-MHN-A11	10.1",1000nits,1920x1200,T2070,LID10C,8in1,V1
ULH1015-MHN-T11	10.1",1000nits,1920x1200,T2070,LID10C,AD68862HP,DC12V,8in1,V1

Optional Accessories

Part Number	Description
840612051212	ADAPTER,AC/DC,12V/5A,60W.Power-Din-4P,CWT.G99-ABF060F-N022.Efficiency-level-6,R
810618301010	CABLE,POWER,AC,1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE,POWER,AC,1830mm UK type
810618301170	CABLE,POWER,AC,1830mm Australia type
810618301031	CABLE,POWER,AC,1830mm Japan type

Customer request

Touch	SCT (Single-Touch), PCT (Multi-Touch)
Glass	Tempered glass, AR coating.....