



## DLF/DLH3200-B 32" TFT LCD, 2000nits LED Backlight, 1920x1080

The DLF/DLH3200-B is 32 inch industrial grade sunlight readable LCD, with high brightness 2000 nits, it produces sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, digital signage in retail stores, conference rooms, broadcast studios, public information.

### Key Features

- High brightness 2000nits
- Sunlight Readable
- LED Backlight
- Wide Viewing Angle of 178°(H), 178°(V)
- Wide Operation Temperature (-20°C ~60 °C)
- LCD Blacking Defect Free (H-Tni 105°C)
- Low Power Consumption
- BL MTBF: 100,000 hours



### Specifications

<b>Model Name</b>	<b>DLF/DLH3200-B</b>
<b>Description</b>	32" TFT LCD, 2000nits LED Backlight, 1920x1080
<b>Screen Size</b>	32"
<b>Display Area (mm)</b>	698.40(H) x 392.85(V)
<b>Brightness</b>	2000 cd/m <sup>2</sup>
<b>Resolution</b>	1920x1080
<b>Aspect Ratio</b>	16 : 9
<b>Contrast Ratio</b>	1500 : 1
<b>Pixel Pitch (mm)</b>	0.36375(H) x 0.36375(V)
<b>Pixel Per Inch (PPI)</b>	69
<b>Viewing Angle</b>	178°(H),178°(V)
<b>Color Saturation (NTSC)</b>	82%
<b>Display Colors</b>	16.7M
<b>Response Time (Typical)</b>	8ms
<b>Panel Interface</b>	LVDS
<b>Input Interface</b>	DVI-I, HDMI, DP
<b>Input Power</b>	AC100~240V
<b>Power Consumption</b>	68W (72W with AD Board)
<b>OSD Key</b>	4 Keys (Power Switch, Menu, +, -)
<b>OSD Control</b>	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
<b>Dimensions (mm)</b>	732.4 x 426.85 x 19.9
<b>Bezel Size(U/B/L/R)</b>	16.5/17.5/17.0/17.0 mm
<b>Weight (Net)</b>	5.45kg
<b>Operating Temperature</b>	-20 °C ~ 60 °C
<b>Storage Temperature</b>	-20 °C ~ 70 °C

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board

*Specifications are subject to change without notice.*



*All brands or product names are trademarks or registered trademarks of their respective companies.*





## Mechanical Drawing

### Outline Dimensions

Unit:mm

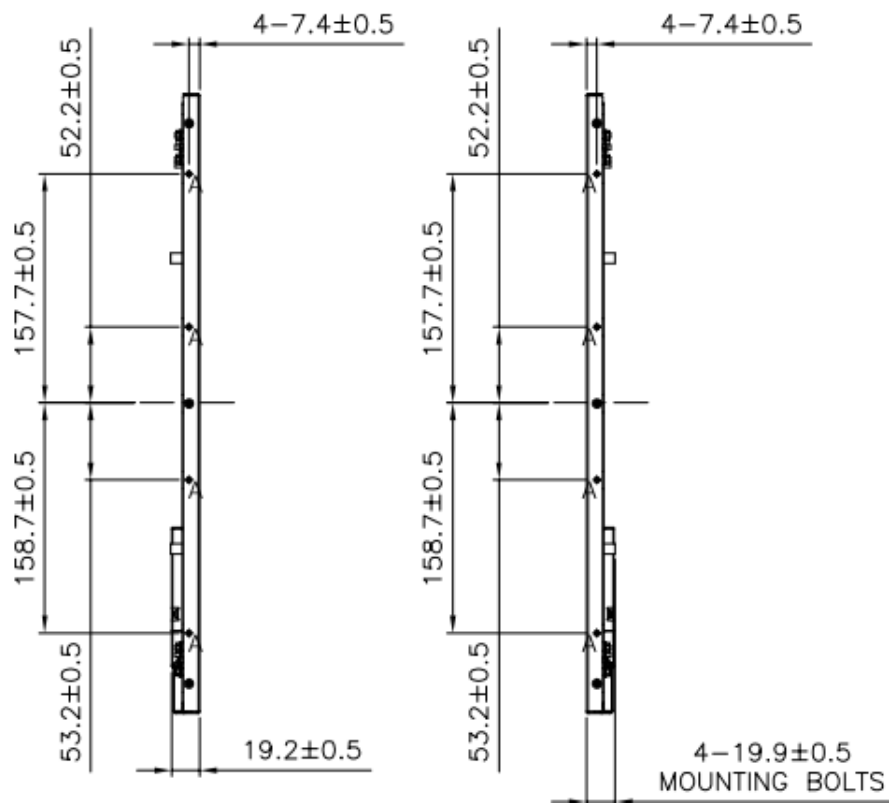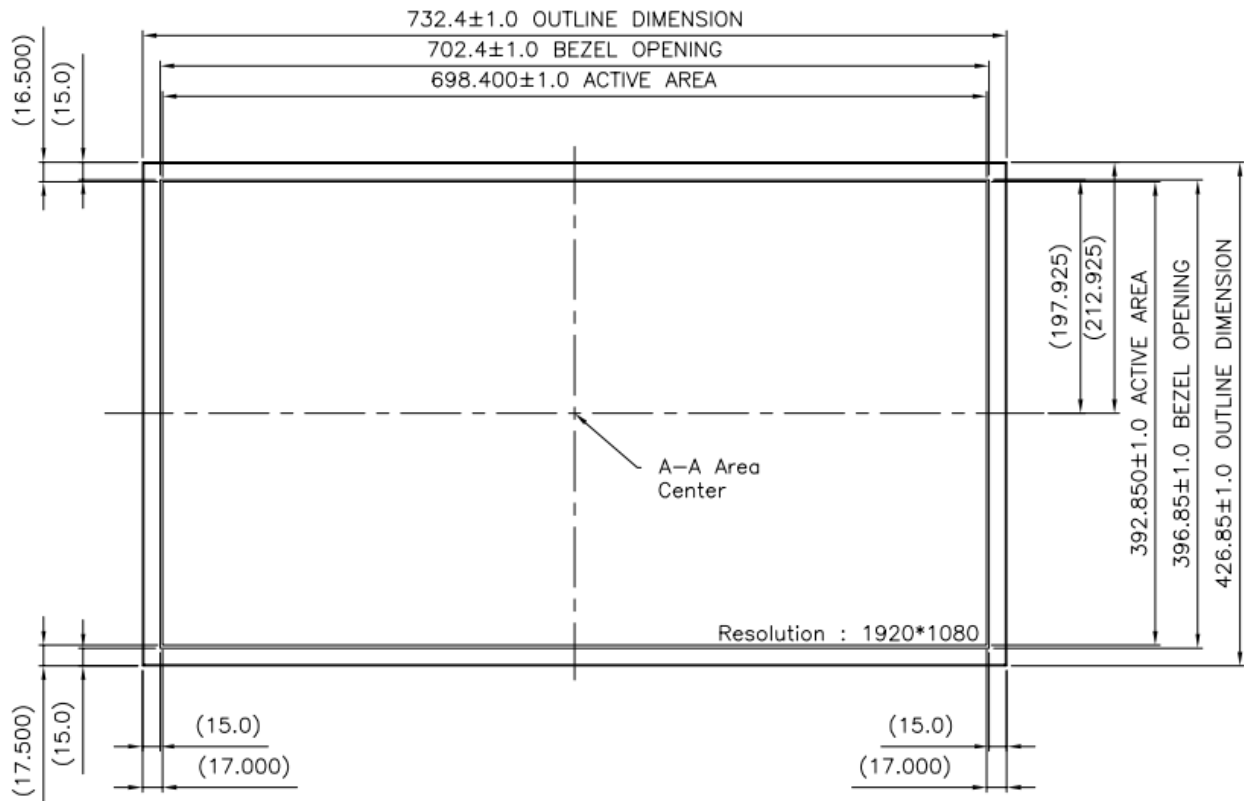

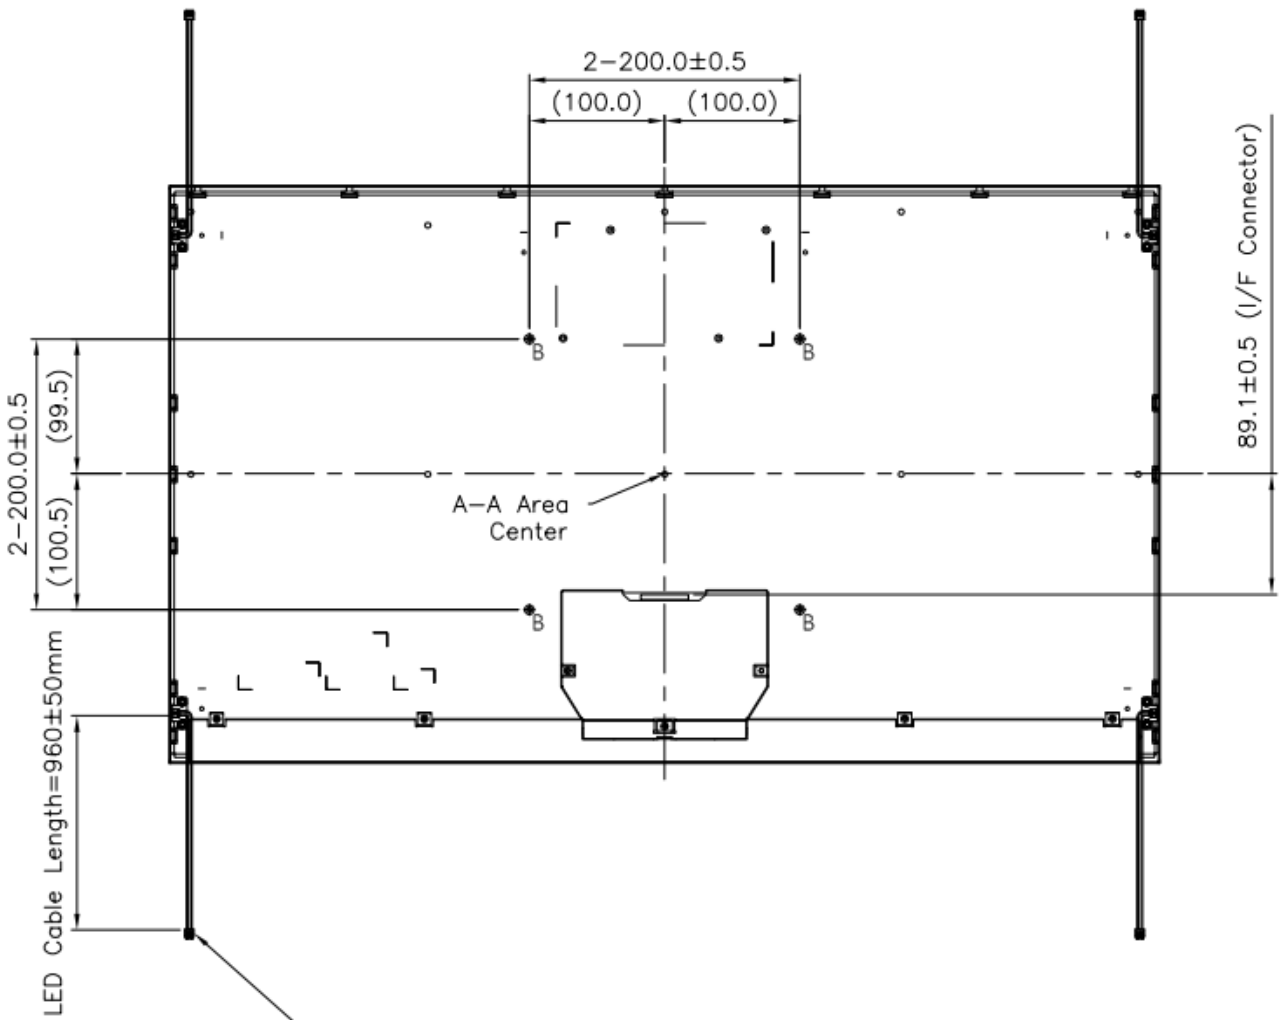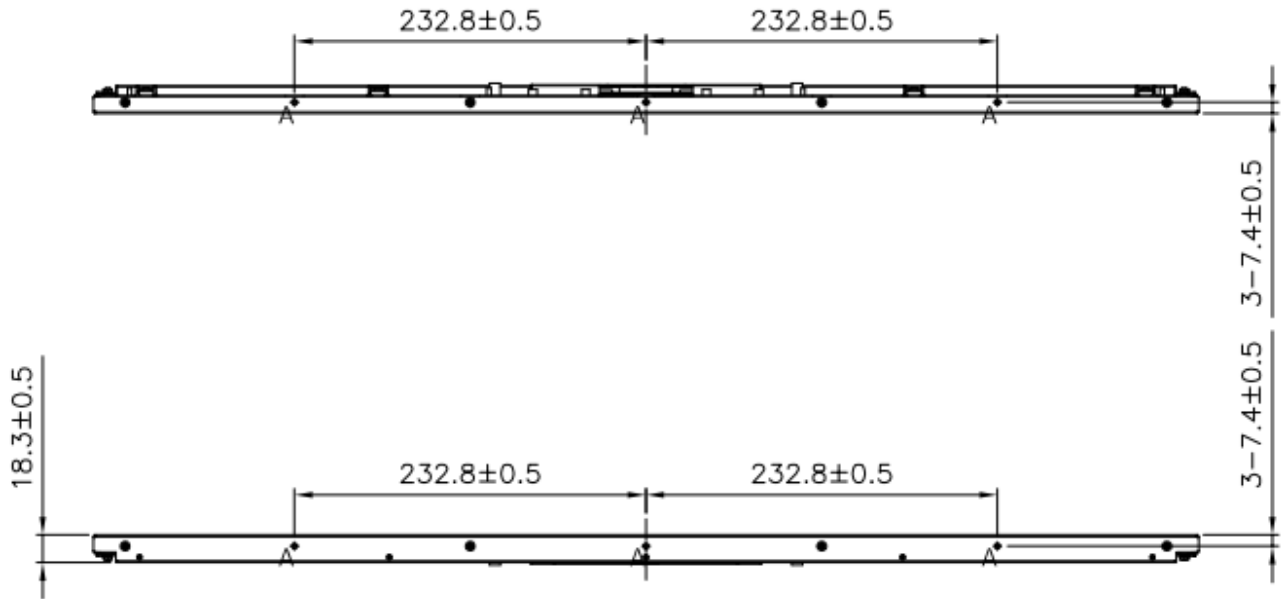

LED Cable Housing:  
JST EHR-2 or Compatible (4X)

A	M3 MOUNTING HOLE (14X) DP=4.0mm MAX SCREW
B	M4 MOUNTING HOLE (4X) DP=8.0mm MAX SCREW



### Ordering Information

Part Number	Description
<b>DLF3200-BNE-A11</b>	32",2000nits,1920x1080,T2060,HTni,LID32C,2in1,V1
<b>DLH3200-BNE-Q11</b>	32",2000nits,1920x1080,T2060,HTni,LID32C,AD8891DHP,AC100~240V,2in1,V1

### Optional Accessories

Part Number	Description
<b>810618301010</b>	CABLE,POWER,AC,1830mm USA type
<b>810618301090</b>	CABLE,POWER,AC,1830mm Europe type
<b>810618301050</b>	CABLE,POWER,AC,1830mm UK type
<b>810618301170</b>	CABLE,POWER,AC,1830mm Australia type
<b>810618301031</b>	CABLE,POWER,AC,1830mm Japan type

### Customer request

<b>Touch</b>	PCT (Multi-Touch)
<b>Glass</b>	Tempered glass, AR coating.....