



# IPPD-1968-2662-SPN0

19" Front IP65 P-CAP Industrial Monitor

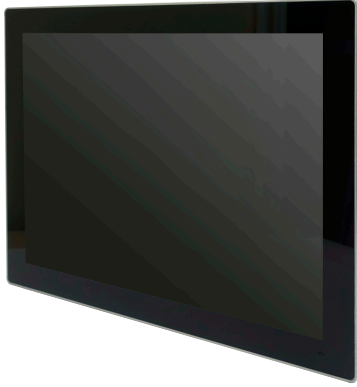


## Key Features

- 19" LCD, 1280 x 1024 pixel
- 10 points P-CAP touch screen
- Front IP 65 / (Full IP65 optional)
- Wide Temperature(-30°C ~ 85°C)
- True Flat & Narrow Bezel

System color	Black
Machanical	Front Side: Aluminum / Back Side: Heavy-duty steel
<b>IPPD-1968</b>	
<b>Display</b>	
Display type	19" TFT LCD
Display area (mm)	376.3(H) x 301.1(V) mm
Aspect ratio	5 : 4
Resolution	1280 x 1024 pixel
Luminance/Brightness	1600 cd/m <sup>2</sup>
Color	16.7M
Color saturation (NTSC)	80%
Pixel pitch (H/V)	0.294mm x 0.294mm
Contrast ratio	1000 : 1 (typ.)
Response time (Typical)	10ms
Viewing angle (H/V)	170°/160° (typ.)
Backlight MTBF	70,000 hrs (typ.)
Touch screen type	P-CAP 10 points touch screen (RS232)
LCD Power consumption	43W
<b>Environment</b>	
IP level	Front IP65
Operating temperature	-30°C ~ 85°C
Storage temperature	-30°C ~ 85°C
Relative humidity	0% ~ 90% (non-condensing)
Dimensions(w/o BOX PC)	439.56mm(W) x 37.5mm(D) x 364.3mm(H)
Weight(w/o BOX PC)	7 kg

## Dimensions

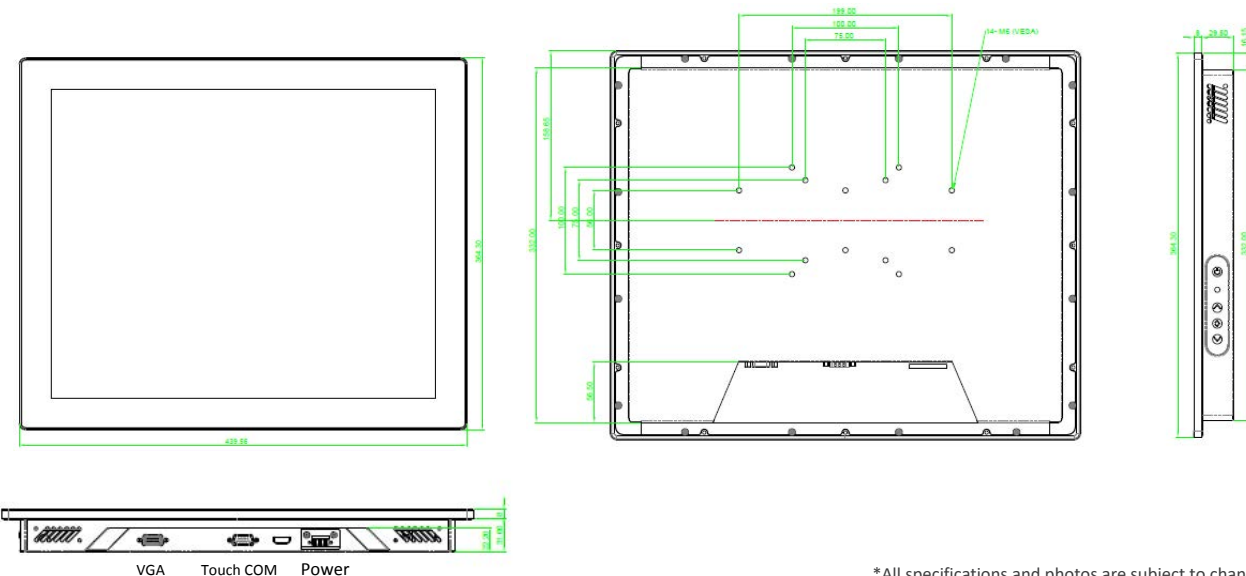

\*All specifications and photos are subject to change without prior notice